

80t TELESCOPIC SPREADER BEAM

Maxirig
QUALITY LIFTING SOLUTIONS



**MODEL
TSB1806**

SPECIFICATION

Tare Weight:	0.605t (Excl. slings/shackles)
Lifting lugs (top) suit:	55t Grade S bow shackle
Load lugs (lower) suit:	55t Grade S bow shackle
Centre lug suits:	12t Grade S bow shackle


ASSURANCE

Compliance Standard:	AS4991-2004
Proof load tested:	Yes
NDT Weld Inspection:	Yes
Standard Finish*:	Painted (G36 Green)

*Other colours/finishes available on request

LOAD CHART

Span (Mtrs)	WLL (at included sling angle)				Approx. Sling Leg Length (Mtrs)			Approx. Headroom (Mtrs)		
	60°	90°	120°	CENTRE LIFT	60°	90°	120°	60°	90°	120°
4.0m	80t	70t	40t	9t	4.0	2.8	2.3	3.5	2.0	1.2
4.5m	80t	70t	40t	8t	4.5	3.2	2.6	3.9	2.3	1.3
5.0m	80t	70t	40t	7t	5.0	3.5	2.9	4.3	2.5	1.4
5.5m	80t	70t	40t	6t	5.5	3.9	3.2	4.8	2.8	1.6
6.0m	80t	70t	40t	5t	6.0	4.2	3.5	5.2	3.0	1.7

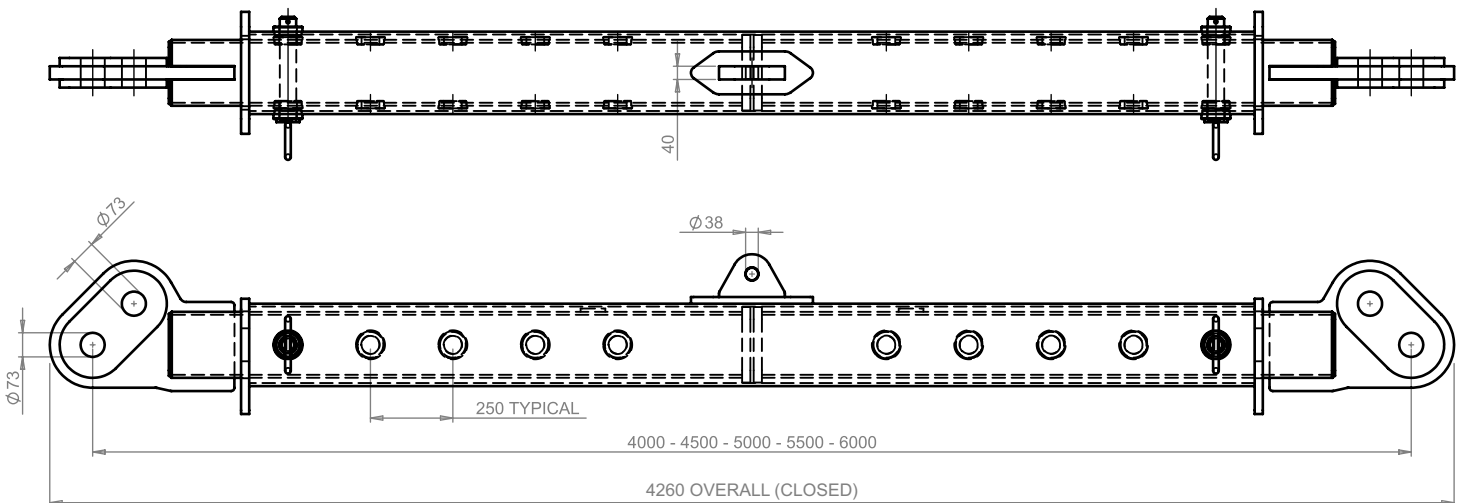

SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE
All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers

maxirig.com.au